



輕量機型



鐵質外框



安裝鎖孔



ABS 扇葉



粉體烤漆

90 小風機 / 橫流扇



低能耗不佔空間 | 超輕量機型


規格表

機型	長度 (cm)	電源規格 (∅ Hz V)	輸入功率 (W)	運轉電流 (A)	風速 (m/s)	風量 (m ³ /h)
FL-9029H	42	1∅60Hz 110V/220V	80	0.75/0.37	12.0	650
FL-9045H	60		165	1.60/0.78		950
FL-9060H	75		185	1.68/0.84		1300

(以上機型標準配備置為鐵質外框、塑膠扇葉)



- ◎ 風量射程為無干擾之測試數據，實際使用請評估現場環境因素
- ◎ 以上機型適用於早餐車、電梯送風、機械器具散熱、小型出入口等場所
- ◎ 在有濕氣、水氣、落塵量大或汽油、化學揮發性及腐蝕性環境，應選配其他機型

電梯安裝示意圖：

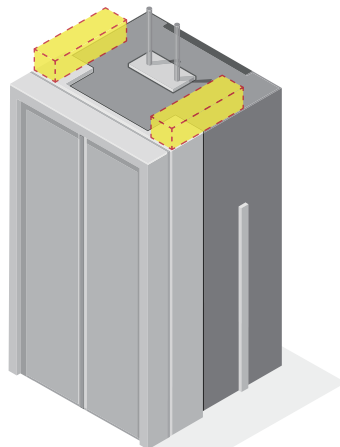

尺寸圖

型號	A	B	C	D	E	F	G
FL-9029	420	390	375	130	126	150	40
FL-9045	600	555	540				
FL-9060	750	715	695				

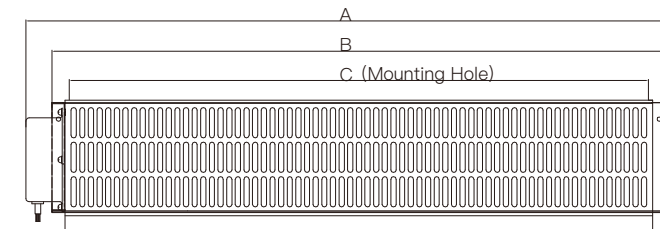

上：頂面
下：側面