



輕量機型



鐵質外框



安裝鎖孔



ABS 扇葉



粉體烤漆

# 90 小風機 / 橫流扇



低能耗不佔空間 | 超輕量機型


規格表

| 機型       | 長度<br>(cm) | 電源規格<br>(Ø Hz V)     | 輸入功率<br>(W) | 運轉電流<br>(A) | 風速<br>(m/s) | 風量<br>(m³/h) |
|----------|------------|----------------------|-------------|-------------|-------------|--------------|
| FL-9029H | 42         | 1Ø 60Hz<br>110V/220V | 80          | 0.75/0.37   | 12.0        | 650          |
| FL-9045H | 60         |                      | 165         | 1.60/0.78   |             | 950          |
| FL-9060H | 75         |                      | 185         | 1.68/0.84   |             | 1300         |

(以上機型標準配備置為鐵質外框、塑膠扇葉 )



- ◎ 風量射程為無干擾之測試數據，實際使用請評估現場環境因素
- ◎ 以上機型適用於早餐車、電梯送風、機械器具散熱、小型出入口等場所
- ◎ 在有濕氣、水氣、落塵量大或汽油、化學揮發性及腐蝕性環境，應選配其他機型
- ◎ 可搭配繼電器磁簧組 / 微動開關 / 紅外線控制

電梯安裝示意圖：

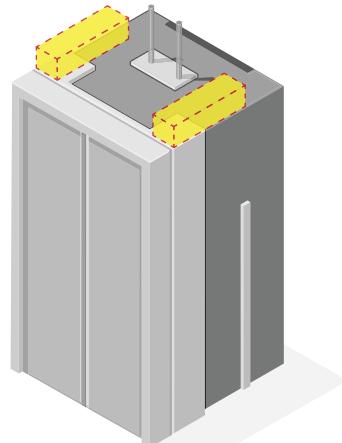

尺寸圖

| 型號      | A   | B   | C   | D   | E   | F   | G  |
|---------|-----|-----|-----|-----|-----|-----|----|
| FL-9029 | 420 | 390 | 375 | 130 | 126 | 150 | 40 |
| FL-9045 | 600 | 555 | 540 |     |     |     |    |
| FL-9060 | 750 | 715 | 695 |     |     |     |    |

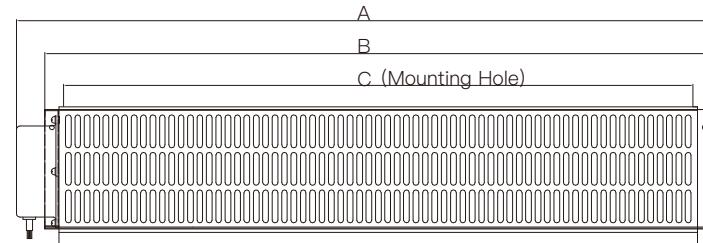

上：頂面  
下：側面